


Longse

FULL COLOR **VALUE**  
**PRO** FACE RECOGNITION  
DEDICATION **CO** AUDIO **KITS**  
SMART **EE** WIFI POE



# Longse

FULL COLOR  
**PRO**  
DEDICATION

FACE RECOGNITION  
**VALUE**  
**CO** AUDIO **KITS**  
**EE** WIFI POE



# C Company Profile

Longse Technology Limited was founded in 2006, is a professional IOT (Internet of Things) solution provider with video as the core, providing security, visual management and big data service for the world. We uphold the values of dedication, integrity, innovation and excellence, aspiring to become a first-class national enterprise and world-class enterprise.

## Mission

More secure, More intelligent

## Core Values

Dedication, Integrity, Innovation, Excellence

## Vision

Become a first-class national and world-class enterprise

## Location

An IOT (Internet of Things) solution provider with video as the core, providing security, visual management and big data service for the world



# Catalogue

## IP Security Cameras

Special Security Cameras .....	02-03
Full Color IP Security Cameras .....	04-06
Value IP Security Cameras .....	07-08
Pro IP Security Cameras .....	09-10
Eco IP Security Cameras .....	11-12
WiFi IP Security Cameras .....	13-14

## Smart Consumer Cameras

Smart Consumer Camera .....	15-17
-----------------------------	-------

## NVR/DVR Systems

NVR Systems .....	18-21
XVR Systems .....	22-24

## IP/Analog Security Systems

Wi-Fi Security Systems .....	25
POE Security Systems .....	26
Full Color XVR Security Systems .....	27
XVR Security Systems .....	28

## Analog Security Cameras

Full Color AHD Analog Security Cameras .....	29-30
AHD Analog Security Cameras .....	31-34
Full Color TVI Security Cameras .....	35-36
TVI Analog Security Cameras .....	37-40
Eco Analog Security Cameras .....	41-42
SDI Analog Security Cameras .....	43-44

## PTZ Security Cameras

AI/IP PTZ Security Cameras .....	47
Analog PTZ Security Cameras .....	48

## Accessories

CCTV Accessories .....	49-50
------------------------	-------

# IPC/HD Product Family

## Turret



CMLC



CMSD



CMSA



CMSB



CMLB



CMSC



LIRDBA



LIRDCA



LIRDLA



CMLA

## Dome



LMDN



LVDBH



LCDNK20



LMDH

## Bullet



BMLC



BMSE



BPSC



BMMB



BMSD



BMSC



BMSA



LBF30



LBE60/90



BMLA



LBB60/90



LBP60/90

## Other



LMCM25



LMCM30



LMCM36



LMBM25



LMBM30



LMBM36



LMEM30



LBCD



LMDE



# Special Cameras

2MP | 5MP | 8MP



Smart Analytics



Full Color



White Light  
Warning



Alarm I / O



Mic+Speaker



IP67

# Panoramic

## Dual lens Camera



### Active Deterrence Camera



BMLC

CMLC

BMSE

### Box IP Camera



LBCE

### Fisheye IP Camera



LMDE

# Full Color

## IP Security Cameras

2MP | 4MP | 8MP

Starlight



Full Color



White Light  
Warning



SD Card Slot



HDR 120/140DB



Internal POE




Alarm I / O



Audio I / O



3D NR

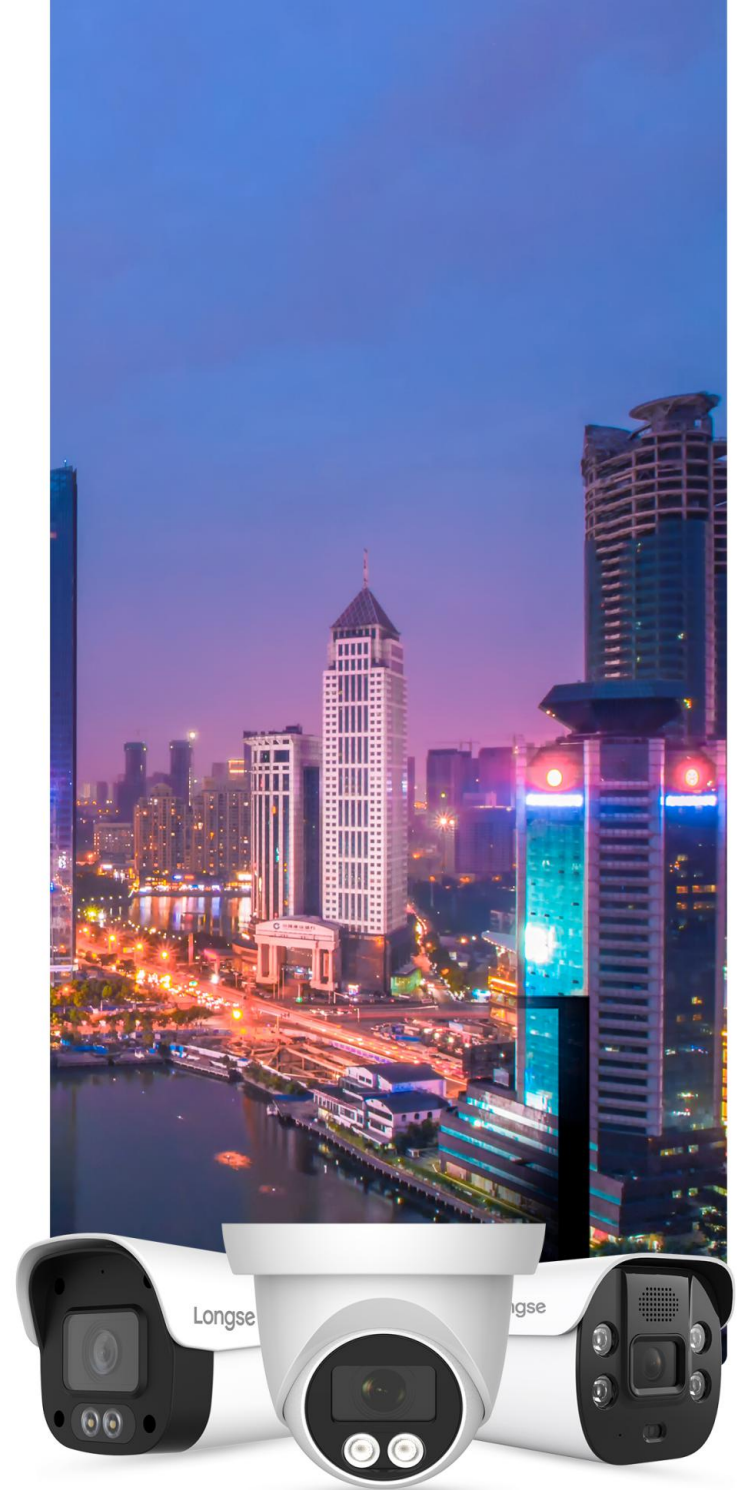

# 2MP/4MP/5MP/8MP Full Color IP Security Cameras

NEW

Super Starlight

	2MP KF200WH	4MP FG400WH	2MP RL200WH	4MP RL400WH	4MP RP400WH	5MP KL500WH	8MP RL800WH	8MP KL800WH
--	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

	Camera										
	Image Sensor	Resolution	Effective Pixels	Compression	TV System	Electronic Shutter Time	Minimum Illumination	S/N Ratio	Scanning System	Video Output	Reset Button
	1/2.8" CMOS sensor	2MP 1080P	1920(H)*1080 (V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: 1/3-1/10000Sec	Color : 0.01 lux@F1.6, 0 Lux with white light	≥ 60dB	Progressive	Network	Optional
	1/3" Progressive Scan CMOS Sensor	4MP	2560(H)*1440(V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color : 0.01 lux@F1.6, 0 Lux with white light	≥ 60dB	Progressive	Network	Optional
	1/2.8" SONY Starvis Back-illuminated CMOS Sensor	2MP 1080P	1945(H)*1097(V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color: 0.001 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	≥ 52dB	Progressive	Network	Optional
	1/2.8" SONY Starvis Back-illuminated CMOS sensor	4MP	2616 (H) x 1964 (V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color: 0.003 lux@F1.6,AGC ON; B/W: 0 lux with IR	≥ 52dB	Progressive	Network	Optional
	1/1.8" SONY Starvis Back-illuminated CMOS sensor	4MP	2712(H)*1538 (V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: 1/3-1/10000Sec	Color: 0.0005Lux @ (F1.0, AGC ON), 0 Lux with white light	≥ 52dB	Progressive	Network	Optional
	1/2.8" SONY Starvis Back-illuminated CMOS sensor	5MP	2616 (H)*1964 (V)	H.264/H.265/JPEG/AVI	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color: 0.006 Lux @ (F1.6, AGC ON), B/W: 0 Lux with white light	≥ 52dB	Progressive	Network	Optional
	1/2.8" SONY Starvis Back-illuminated CMOS sensor	8MP	3864(H)*2192(V)	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color: 0.005 Lux @ (F1.0, AGC ON), 0 Lux with white light	≥ 52dB	Progressive	Network	Optional
	1/2.8" SONY Starvis Back-illuminated CMOS sensor	8MP	3864(H)*2192(V)	H.264/H.265/JPEG/AVI	PAL/NTSC	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Color: 0.02 Lux @ (F1.0, AGC ON), 0 Lux with white light	≥ 52dB	Progressive	Network	Optional
Network											
	Ethernet	RJ-45 (10/100Base-T)		RJ-45 (10/100Base-T)		RJ-45 (10/100Base-T)		RJ-45 (10/100Base-T)		RJ-45 (10/100Base-T)	
	Wireless	N/A		N/A		N/A		N/A		N/A	
	ONVIF	Support ONVIF 2.4(Profile S/T/G)		Support ONVIF 2.4(Profile S/T/G)		Support ONVIF 19.12(Profile S/T/G)		Support ONVIF 19.12(Profile S/T/G)		Support ONVIF 19.12(Profile S/T/G)	
	POE	Internal, Support IEEE 802.3af		Internal, Support IEEE 802.3af		Internal, Support IEEE 802.3af		Internal, Support IEEE 802.3af		Internal, Support IEEE 802.3af	
	Video Delay	0.3S (Within the Lan)		0.3S (Within the Lan)		0.3S (Within the Lan)		0.3S (Within the Lan)		0.3S (Within the Lan)	
	Main Stream 1	1920*1080@30fps	2688*1512@25fps	2304*1296@30fps	2592*1944@30p	2688*1512@30fps	2592*1944@30p	3840*2160@30fps, 3072*2048@30fps	3840*2160@18fps		
	Main Stream 2	1280*720@30fps	2560*1440@30fps	1920*1080@30fps	2560*1440@30p	2560*1440@30fps	2560*1440@30p	2592*1536@30fps, 2560*1440@30fps	2560*1440@18fps		
	Main Stream 3	720*480@30fps	1920*1080@20fps, 1280*720@20fps	1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@18fps, 1280*720@18fps		
	Sub Stream 1	720*480@30fps	1280*720@30fps	1280*720@30fps, 720*480@30fps	1280*720@30fps, 720*480@30fps	1280*720@30fps	1280*720@30p	1280*720@30fps, 720*480@30fps	1280*720@18fps		
	Sub Stream 2	N/A	720*480@30fps	352*288@30fps	720*480@30fps	720*480@30fps	720*480@30p	352*288@30fps	720*480@18fps		
	Sub Stream 3	N/A	N/A	N/A	N/A	352*288@30fps	N/A	N/A	N/A		
	Tri Stream	N/A	N/A	1280*720@30fps, 720*480@30fps, 352*288@30fps	1280*720@30fps, 720*480@30fps, 352*288@30fps	1280*720@30fps, 720*480@30fps, 352*288@30fps	N/A	1280*720@30fps, 720*480@30fps, 352*288@30fps	N/A		
AI Function											
	Intelligent Analysis	Intrusion Detection, (based on human detection), Motion detection based on human detection, Vehicle Detection	Intrusion Detection	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection based on human detection, Motion detection based on human detection
Camera Features											
	Day/Night	Color	Color	Color	Color	Color	Color	Color	Color	Color	Color
	Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
	Full Color	N/A	Support	Support	Support	Support	Support	Support	Support	Support	Support
	Corridor Pattern	N/A	Support	Support	Support	Support	Support	Support	Support	Support	Support
	Defog Mode	N/A	Support	Support	Support	Support	Support	N/A	Support	Support	N/A
	ROI	Support	Support	Support	Support	Support	Support	Support	Support	Support	Support
	BLC	Support	Support	Support	Support	Support	Support	Support	Support	Support	Support
	WDR	DWDR	50dB	120dB	120dB	120dB	120dB	120dB	120dB	120dB	120dB
	Motion Detection	Support	Support	Support	Support	Support	Support	Support	Support	Support	Support
	Privacy Masking	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone
	Recording Mode	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web
Interface											
	Audio	Optional	Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output
	Alarm	N/A	1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	N/A	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output
	SD Card Slot	Optional, Support Max 1TB	Support Max 512GB	Optional Internal, Support Max 512GB	Optional Internal, Support Max 512GB	Optional Internal, Support Max 1TB	Support Max 1TB	Optional Internal, Support Max 512GB	Optional Internal, Support Max 512GB	Optional Internal, Support Max 1TB	Optional Internal, Support Max 1TB
	Rs485	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

IP Cameras

Full Color Series

Value Series

Pro Series

Eco Series

WiFi Series



# 2MP-AF / 4MP-AF / 8MP-AF Full Color IP Security Cameras

		2MP-AF RL200WH	4MP-AF RL400WH	8MP-AF KL800WH
Camera	<b>Image Sensor</b>	1/2.8" SONY Starvis Back-illuminated CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
	<b>Resolution</b>	2MP 1080P	4MP	8MP
	<b>Effective Pixels</b>	1945(H)*1097(V)	2616 (H) x 1984 (V)	3864(H)*2192(V)
	<b>Compression</b>	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.265/JPEG/AVI
	<b>TV System</b>	PAL/NTSC	PAL/NTSC	PAL/NTSC
	<b>Electronic Shutter Time</b>	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
	<b>Minimum Illumination</b>	Color: 0.001 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.0005Lux @ (F1.0, AGC ON), 0 Lux with white light	Color: 0.02 Lux @ (F1.0, AGC ON), 0 Lux with white light
	<b>S/N Ratio</b>	≥ 52dB	≥ 52dB	≥ 52dB
	<b>Scanning System</b>	Progressive	Progressive	Progressive
<b>Video Output</b>	Network	Network	Network	
<b>Reset Button</b>	Optional	Optional	Optional	
Network	<b>Ethernet</b>	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)
	<b>Wireless</b>	N/A	N/A	N/A
	<b>ONVIF</b>	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 19.12(Profile S/T/G)
	<b>POE</b>	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af
	<b>Video Delay</b>	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)
	<b>Main Stream 1</b>	2304*1296@30fps	2592*1944@30fp	3840*2160@18fps
	<b>Main Stream 2</b>	1920*1080@30fps	2560*1440@30fp	2560*1440@18fps
	<b>Main Stream 3</b>	1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@18fps, 1280*720@18fps
	<b>Sub Stream 1</b>	1280*720@30fps, 720*480@30fps	1280*720@30fps, 720*480@30fps	1280*720@18fps
	<b>Sub Stream 2</b>	352*288@30fps	720*480@30fps	720*480@18fps
<b>Sub Stream 3</b>	N/A	N/A	N/A	
<b>Tri Stream</b>	1280*720@30fps, 720*480@30fps, 352*288@30fps	1280*720@30fps, 720*480@30fps, 352*288@30fps	N/A	
<b>AI Function</b>	<b>Intelligent Analysis</b>	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection(based on human detection),Motion detection based on human detection
Camera Features	<b>Day/Night</b>	Color	Color	Color
	<b>Image Config</b>	Saturation/Brightness/Contrast/Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast/Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast/Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
	<b>Full Color</b>	N/A	N/A	Support
	<b>Corridor Pattern</b>	Support	Support	Support
	<b>Defog Mode</b>	Support	Support	N/A
	<b>ROI</b>	Support	Support	Support
	<b>BLC</b>	Support	Support	Support
	<b>WDR</b>	120dB	120dB	120dB
	<b>Motion Detection</b>	Support	Support	Support
	<b>Privacy Masking</b>	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone
<b>Recording Mode</b>	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	
Interface	<b>Audio</b>	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output
	<b>Alarm</b>	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output
	<b>SD Card Slot</b>	Optional Internal, Support Max 512GB	Optional Internal, Support Max 512GB	Optional Internal, Support Max 1TB
	<b>Rs485</b>	N/A	N/A	N/A

IP Camera

Full Color Series

Value Series

Pro Series

Eco Series

WiFi Series



H.265+

POE

WDR

SD Card Slot

Audio



# VALUE

## IP Security Cameras

# 2MP/ 2MP-AF/4MP/4MP-AF/5MP/ 5MP-AF/8MP/8MP-AF IP Security Cameras

		NEW			NEW			NEW
		2MP KF200	2MP FG200   2MP-AF 5XFG200	4MP FG400   4MP-AF 5XFG400	5MP KL500   5MP-AF 5XKL500	8MP KL800   8MP-AF 5XKL800		
Camera	<b>Image Sensor</b>	1/2.8" CMOS sensor	1/2.9" Progressive Scan CMOS Sensor	1/3" Progressive Scan CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor		
	<b>Resolution</b>	2MP 1080P	2MP 1080P	4MP	5MP	8MP		
	<b>Effective Pixels</b>	1920(H)*1080 (V)	1920(H)*1080(V)	2560(H)*1440(V)	2616 (H)*1964 (V)	3864(H)*2192(V)		
	<b>Compression</b>	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.265/JPEG/AVI	H.264/H.265/JPEG/AVI		
	<b>TV System</b>	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC		
	<b>Electronic Shutter Time</b>	Auto: 1/3-1/100000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec		
	<b>Minimum Illumination</b>	Color: 0.01 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	0.01Lux	0.01Lux	Color: 0.006 Lux @ (F1.6, AGC ON), B/W: 0 Lux with white light	Color: 0.02 Lux @ (F1.0, AGC ON), 0 Lux with white light		
	<b>S/N Ratio</b>	≥ 60dB	≥ 60dB	≥ 60dB	≥ 52dB	≥ 52dB		
	<b>Scanning System</b>	Progressive	Progressive	Progressive	Progressive	Progressive		
	<b>Video Output</b>	Network	Network	Network	Network	Network		
<b>Reset Button</b>	Optional	Optional	Optional	Optional	Optional			
Network	<b>Ethernet</b>	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)		
	<b>Wireless</b>	N/A	N/A	N/A	N/A	N/A		
	<b>ONVIF</b>	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 19.12(Profile S/T/G)	Support ONVIF 19.12(Profile S/T/G)		
	<b>POE</b>	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af		
	<b>Video Delay</b>	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)		
	<b>Main Stream 1</b>	1920*1080@30fps	2304*1296@30fps	2688*1512@25fps	2592*1944@30p	3840*2160@18fps		
	<b>Main Stream 2</b>	1280*720@30fps	1920*1080@30fps	2560*1440@30fps	2560*1440@30p	2560*1440@18fps		
	<b>Main Stream 3</b>	720*480@30fps	1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@18fps, 1280*720@18fps		
	<b>Sub Stream 1</b>	720*480@30fps	1280*720@30fps	1280*720@30fps	1280*720@30fps	1280*720@18fps		
	<b>Sub Stream 2</b>	N/A	720*480@30fps	720*480@30fps	720*480@30fps	720*480@18fps		
<b>Sub Stream 3</b>	N/A	N/A	N/A	N/A	N/A			
<b>Tri Stream</b>	N/A	N/A	N/A	N/A	N/A			
<b>AI Function</b>	<b>Intelligent Analysis</b>	Intrusion Detetion, (based on human detection),Motion detection based on human detection,Vehicle Detection	Intrusion Detetion	Intrusion Detetion	Intrusion Detetion, Line Cross Detetion, Leter Detetion, People Gather Detetion(based on human detetion),Motion detetion based on human detetion	Intrusion Detetion, Line Cross Detetion, Leter Detetion, People Gather Detetion(based on human detetion),Motion detetion based on human detetion		
Camera Features	<b>Day/Night</b>	Color	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )		
	<b>Image Config</b>	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering,HLC	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)		
	<b>Full Color</b>	N/A	N/A	N/A	N/A	N/A		
	<b>Corridor Pattern</b>	N/A	N/A	Support	Support	Support		
	<b>Defog Mode</b>	N/A	Support	Support	N/A	N/A		
	<b>ROI</b>	Support	Support	Support	Support	Support		
	<b>BLC</b>	Support	Support	Support	Support	Support		
	<b>WDR</b>	DWDR	50dB	50dB	120dB	120dB		
	<b>Motion Detection</b>	Support	Support	Support	Support	Support		
	<b>Privacy Masking</b>	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone		
<b>Recording Mode</b>	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web			
Interface	<b>Audio</b>	Optional	Optional	Optional	Audio Input/Output	Optional		
	<b>Alarm</b>	N/A	N/A	N/A	N/A	Optional		
	<b>SD Card Slot</b>	Optional, Support Max 1TB	Optional, Support Max 512GB	Optional, Support Max 512GB	Support Max 1TB	Optional, Support Max 1TB		
	<b>Rs485</b>	N/A	N/A	N/A	N/A	N/A		

IP Camera

Full Color Series

Value Series

Pro Series

Eco Series

WiFi Series

# PRO

## IP Security Cameras



H.265/H.265+



IP67



HDR 120DB



Alarm



Internal POE



Audio



# 2MP / 2MP-AF / 4MP / 4MP-AF/ 8MP / 8MP-AF IP Security Cameras

		2MP RL200 / 2MP-AF 5XRL200	4MP RL400 / 4MP-AF 5XRL400	4K RL800 / 4K-AF 5XRL800
Camera	Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
	Resolution	2MP 1080P	4MP	8MP
	Effective Pixels	1945(H)*1097(V)	2616 (H) x 1964 (V)	3864(H)*2192(V)
	Compression	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
	Minimum Illumination	0.005Lux	0.01Lux	0.01Lux
	S/N Ratio	≥ 52dB	≥ 52dB	≥ 52dB
	Scanning System	Progressive	Progressive	Progressive
	Video Output	Network	Network	Network
Reset Button	Optional	Optional	Optional	
Network	Ethernet	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)
	Wireless	N/A	N/A	N/A
	ONVIF	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)
	POE	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af
	Video Delay	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)
	Main Stream 1	2304*1296@30fps	2592*1944@30fp	3840*2160@30fps, 3072*2048@30fps
	Main Stream 2	1920*1080@30fps	2560*1440@30fp	2592*1536@30fps, 2560*1440@30fps
	Main Stream 3	1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1920*1080@30fps, 1280*720@30fps
	Sub Stream 1	1280*720@30fps, 720*480@30fps	1280*720@30fps, 720*480@30fps	1280*720@30fps, 720*480@30fps
	Sub Stream 2	352*288@30fps	720*480@30fps	352*288@30fps
Sub Stream 3	N/A	N/A	N/A	
Tri Stream	1280*720@30fps, 720*480@30fps, 352*288@30fps	1280*720@30fps, 720*480@30fps, 352*288@30fps	1280*720@30fps, 720*480@30fps, 352*288@30fps	
AI Function	Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection	N/A	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection
Camera Features	Day/Night	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )
	Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
	Full Color	N/A	N/A	N/A
	Corridor Pattern	Support	Support	Support
	Defog Mode	Support	Support	Support
	ROI	Support	Support	Support
	BLC	Support	Support	Support
	WDR	120dB	120dB	120dB
	Motion Detection	Support	Support	Support
	Privacy Masking	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone
Recording Mode	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	
Interface	Audio	Optional Audio Input/Output	Optional Audio Input/Output	Optional Audio Input/Output
	Alarm	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output	Optional 1 Channel Input/Output
	SD Card Slot	Optional Internal, Support Max 512GB	Optional Internal, Support Max 512GB	Optional External, Support Max 512GB, Built in 4G Storage
	Rs485	N/A	N/A	N/A

IP Camera

Full Color Series

Value Series


Pro Series

Eco Series

WiFi Series

# ECO

## IP Security Cameras



H.265+



POE



WDR



SD Card Slot



Alarm



Audio



# 2MP/4MP IP Security Cameras

		2MP GC200	2MP FG200	4MP FG400
Camera	Image Sensor	1/2.9" Progressive Scan CMOS Sensor	1/2.9" Progressive Scan CMOS Sensor	1/3" Progressive Scan CMOS Sensor
	Resolution	2MP 1080P	2MP 1080P	4MP
	Effective Pixels	1928(H)*1088(V)	1928(H)*1088(V)	2560(H)*1440(V)
	Compression	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
	Minimum Illumination	0.01Lux	0.01Lux	0.01Lux
	S/N Ratio	≥ 60dB	≥ 60dB	≥ 60dB
	Scanning System	Progressive	Progressive	Progressive
	Video Output	Network	Network	Network
Reset Button	Optional	Optional	Optional	
Network	Ethernet	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)
	Wireless	N/A	N/A	N/A
	ONVIF	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)
	PoE	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af
	Video Delay	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)
	Main Stream 1	2304*1296@20fps	2304*1296@20fps	2688*1512@25fps
	Main Stream 2	1920*1080@30fps	1920*1080@30fps	2560*1440@30fps
	Main Stream 3	1280*720@30fps	1280*720@30fps	1920*1080@30fps, 1280*720@30fps
	Sub Stream 1	720*480@20fps, 720*480@30fps	1280*720@30fps	1280*720@30fps
	Sub Stream 2	640*480@20fps, 640*480@30fps	720*480@30fps	720*480@30fps
Sub Stream 3	N/A	N/A	N/A	
Tri Stream	N/A	N/A	N/A	
AI Function	Intelligent Analysis	Intrusion Detection, motion detection based on human detection	Intrusion Detection	Intrusion Detection
Camera Features	Day/Night	Color	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )
	Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control)
	Full Color	N/A	N/A	N/A
	Corridor Pattern	Support	N/A	Support
	Defog Mode	Support	Support	Support
	ROI	N/A	Support	Support
	BLC	Support	Support	Support
	WDR	N/A	50dB	50dB
	Motion Detection	Support	Support	Support
	Privacy Masking	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone
Recording Mode	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	
Interface	Audio	Optional	Optional	Optional
	Alarm	N/A	N/A	N/A
	SD Card Slot	Optional, Support Max 512GB	Optional, Support Max 512GB	Optional, Support Max 512GB
	Rs485	N/A	N/A	N/A

IP Camera

Full Color Series

Value Series

Pro Series

Eco Series

WiFi Series

# WIFI

## IP Security Cameras



2MP/4MP



H.265+/H.265



WiFi



SD Card Slot



# 2MP/4MP WiFi IP Security Cameras

		2MP HFG200W	4MP FG400W	4MP SS4002W
<b>Camera</b>	<b>Image Sensor</b>	1/2.9" Progressive Scan CMOS Sensor	1/3" Progressive Scan CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
	<b>Resolution</b>	2MP 1080P	4MP	4MP
	<b>Effective Pixels</b>	1945(H)*1097(V)	2560(H)*1440(V)	2616 (H)*1964 (V)
	<b>Compression</b>	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG	H.264/H.264 + /H.265/H.265 + /JPEG/AVI /MJPEG
	<b>TV System</b>	PAL/NTSC	PAL/NTSC	PAL/NTSC
	<b>Electronic Shutter Time</b>	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
	<b>Minimun Illumination</b>	Color: 0.008 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.03 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	0.01Lux
	<b>S/N Ratio</b>	60dB	60dB	≥ 52dB
	<b>Scanning System</b>	Progressive	Progressive	Progressive
	<b>Video Output</b>	Network	Network	Network
<b>Reset Button</b>	Optional	Optional	Optional	
<b>Network</b>	<b>Ethernet</b>	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)	RJ-45 (10/100Base-T)
	<b>Wireless</b>	N/A	N/A	N/A
	<b>ONVIF</b>	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)	Support ONVIF 2.4(Profile S/T/G)
	<b>POE</b>	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af	Internal, Support IEEE 802.3af
	<b>Video Delay</b>	0.3S (Within the Lan)	0.3S (Within the Lan)	0.3S (Within the Lan)
	<b>Main Stream 1</b>	2304*1296@30fps	2688*1512@25fps	2560*1440@30fp
	<b>Main Stream 2</b>	1920*1080@30fps	2560*1440@30fps	1920*1080@30fps
	<b>Main Stream 3</b>	1280*720@30fps	1920*1080@30fps, 1280*720@30fps	1280*720@30fps
	<b>Sub Stream 1</b>	1280*720@30fps	1280*720@30fps	720*480@30fps
	<b>Sub Stream 2</b>	720*480@30fps	720*480@30fps	352*288@30fps
<b>Sub Stream 3</b>	N/A	N/A	N/A	
<b>Tri Stream</b>	N/A	N/A	1280*720@30fps, 720*480@30fps, 352*288@30fps	
<b>Wireless</b>	<b>Antena</b>	7dbi	3dbi	7dbi
	<b>Hotspot</b>	N/A	N/A	N/A
	<b>Wi-Fi</b>	Wi-Fi(IEEE802.11b/g/n),2.4Ghz	Wi-Fi(IEEE802.11b/g/n),2.4Ghz	Wi-Fi(IEEE802.11b/g/n),2.4Ghz
	<b>WIFI Range</b>	No obstacles 300m Max.	No obstacles 300m Max.	No obstacles 300m Max.
<b>Camera Features</b>	<b>Day/Night</b>	Color/ B&W (IR-CUT)	Color/ B&W (IR-CUT)	Color/ B&W (IR-CUT)
	<b>Image Config</b>	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
	<b>Full Color</b>	N/A	N/A	N/A
	<b>Corridor Pattern</b>	Support	Support	Support
	<b>Defog Mode</b>	Support	Support	Support
	<b>ROI</b>	Support	Support	Support
	<b>BLC</b>	Support	Support	Support
	<b>WDR</b>	50dB	50dB	120dB
	<b>Motion Detection</b>	Support	Support	Support
	<b>Privacy Masking</b>	3 Rectangular Zone	3 Rectangular Zone	3 Rectangular Zone
<b>Recording Mode</b>	NVR/VMS/Web	NVR/VMS/Web	NVR/VMS/Web	
<b>Interface</b>	<b>Audio</b>	Optional	Optional	Optional
	<b>Alarm</b>	N/A	N/A	N/A
	<b>SD Card Slot</b>	Support 512G Micro SD With External SD Card Slot	Support 256G Micro SD With External SD Card Slot	Support 512G Micro SD With External SD Card Slot
	<b>Rs485</b>	N/A	N/A	N/A

IP Camera

Full Color Series

Value Series

Pro Series

Eco Series

WiFi Series

# Smart Consumer Camera

2MP | 3MP | 4MP



Battery  
Powered



Wireless  
Connection



Two-way  
Audio



Full Color  
Night Vision



Intelligent  
Features



Cloud &  
Micro SD Card



# Smart Consumer Cameras

## 2MP R2C

## 4MP R4B



Camera	<b>Image Sensor</b>	1/2.9" Progressive Scan CMOS	1/3" Progressive Scan CMOS
	<b>Resolution</b>	2MP	4MP
	<b>Effective Pixels</b>	1920(H)*1080(V)	2560(H)*1440(V)
	<b>Compression</b>	H.264/H.265	H.264/H.265
	<b>Electronic Shutter Time</b>	Auto(1/1.5s ~ 1/30000s)	Auto(1/1.5s ~ 1/30000s)
	<b>S/N Ratio</b>	46dB	47dB
	<b>Scanning System</b>	Progressive	Progressive
	<b>Video Output</b>	Wireless network	Wireless network
	<b>Reset Button</b>	Yes	Yes
	PTZ	<b>Horizontal Rotation Range</b>	N/A
<b>Tilt Rotation Range</b>		N/A	N/A
<b>Guard Points</b>		N/A	N/A
LENS Type	<b>Focus Length</b>	2.8mm F2.0	2.6mm F1.6
	<b>Focus Control</b>	Fixed	Fixed
	<b>Lens Type</b>	Fixed	Fixed
	<b>Pixels</b>	2M Pixels	4M Pixels
Night Vision	<b>Infrared LED</b>	14μ x 8PCS + 14μ x 1PCS White light	14μ x 2PCS + 14μ x 2PCS White light
	<b>Infrared Distance</b>	7M	7M
	<b>IR Status</b>	AGC auto control	AGC auto control
	<b>IR Power On</b>	Auto Control	Auto Control
Network	<b>Ethernet</b>	N/A	N/A
	<b>Protocol</b>	TCP/IP UDP/IP DHCP MQTT P2P	TCP/IP UDP/IP DHCP MQTT P2P
	<b>ONVIF</b>	N/A	N/A
	<b>P2P</b>	Support	Support
	<b>4G</b>	N/A	N/A
	<b>PDE</b>	N/A	N/A
	<b>Main Stream 1</b>	1920*1080@15fps	2560*1440@15fps
	<b>Main Stream 2</b>	N/A	N/A
	<b>Main Stream 3</b>	N/A	N/A
	<b>Sub Stream 1</b>	1280*720@15fps	1280*720@15fps
	<b>Sub Stream 2</b>	N/A	N/A
	<b>Sub Stream 3</b>	N/A	N/A
<b>Tri Stream</b>	N/A	N/A	
Wireless	<b>Hotspot</b>	Support	Support
	<b>Wi-Fi</b>	Wi-Fi(IEEE802.11b/g/n)	Wi-Fi(IEEE802.11b/g/n)
	<b>WIFI Range</b>	No obstacles 100m Max.	No obstacles 100m Max.
Camera Features	<b>Day/Night</b>	Color/ B&W (IR-CUT)	Color/ B&W (IR-CUT)
	<b>Minimum Illumination</b>	0.01 Lux	0.01 Lux
	<b>Image Config</b>	YES	YES
	<b>Corridor Pattern</b>	N/A	N/A
	<b>ROI</b>	N/A	N/A
	<b>Defog Mode</b>	N/A	N/A
	<b>BLC</b>	Support	Support
	<b>HDR</b>	N/A	N/A
	<b>3DNR</b>	Support	Support
	<b>DWDR</b>	WDR	WDR
	<b>Motion Detection</b>	Support	Support
	<b>Privacy Masking</b>	N/A	N/A
	<b>Recording Mode</b>	SD Card	SD Card
	Interface	<b>Audio</b>	2-Way Audio
<b>Alarm</b>		Motion Detection PIR human body infrared detection	Motion Detection PIR human body infrared detection
<b>SD Card Slot</b>		Support Max 128G	Support Max 128G
General	<b>Power</b>	DC 5V/1.5A or 5W solar panel Battery(5200mAh)/(6700mAh Optional)	DC 5V/1.5A or 1 x 18650 5200mAh battery powered

# Smart Consumer Cameras

## 4MP P4A / P4A-S



## 3MP Q2A / Q2A-S



Camera	Image Sensor	1/3" Progressive Scan CMOS	1/2.8" color CMOS Sensor
	Resolution	4MP	3MP
	Effective Pixels	2560(H)*1440(V)	2304(H)*1296(V)
	Compression	H.264/H.265	H.264/H.265
	Electronic Shutter Time	Auto(1/1.5s ~ 1/3000s)	Auto(1/1.5s ~ 1/3000s)
	S/N Ratio	47dB	46dB
	Scanning System	Progressive	Progressive
	Video Output	Wireless network	Wireless network
	Reset Button	Yes	Yes
PTZ	Horizontal Rotation Range	N/A	0 ~ 355°
	Tilt Rotation Range	N/A	0 ~ 90°
	Guard Points	N/A	N/A
LENS Type	Focus Length	2.97mm F1.6	3.2mm F2.2
	Focus Control	Fixed	Fixed
	Lens Type	Fixed	Fixed
	Pixels	4M Pixels	3M Pixels
Night Vision	Infrared LED	14μ x 2PCS + 14μ x 2PCS White light	14μ x 2PCS + 14μ x 2PCS White light
	Infrared Distance	7M	7M
	IR Status	AGC auto control	AGC auto control
Network	IR Power On	Auto Control	Auto Control
	Ethernet	N/A	N/A
	Protocol	TCP/IP UDP/IP DHCP RTMP MUTP	TCP/IP UDP/IP DHCP MQTT P2P
	ONVIF	N/A	N/A
	P2P	Support	Support
	4G	N/A	N/A
	POE	N/A	N/A
	Main Stream 1	N/A	N/A
	Main Stream 2	2560*1440@15fps	2304*1296@15fps
	Main Stream 3	N/A	N/A
	Sub Stream 1	N/A	N/A
	Sub Stream 2	1280*720@15fps	1280*720@15fps
	Sub Stream 3	N/A	N/A
	Tri Stream	N/A	N/A
	Wireless	Antenna	3dbi
Hotspot		N/A	N/A
Wi-Fi		Wi-Fi IEEE802.11b/g/n	Wi-Fi IEEE802.11b/g/n
WiFi Range		No obstacles 100m Max.	No obstacles 100m Max.
Camera Features	Day/Night	Color/ B&W (IR-CUT )	Color/ B&W (IR-CUT )
	Image Config	YES	YES
	Corridor Pattern	N/A	N/A
	ROI	N/A	N/A
	Defog Mode	N/A	N/A
	BLC	Support	Support
	HDR	N/A	N/A
	3DNR	Support	Support
	DWDR	DWDR	WDR
	Motion Detection	Support	Support
	Privacy Masking	N/A	N/A
	Recording Mode	SD Card	SD Card
	Interface	Audio	2-Way Audio
Alarm		Motion Detection PIR human body infrared detection	Motion Detection PIR human body infrared detection
SD Card Slot		Support Max 128G	Support Max 128G
General	Power	DC 5V/1.5A or Battery(9000mAh)	DC 5V/1.5A or Battery(9000mAh)

H.265+

# NVR



H.265/H.265+



Audio I/O



AI Function



P2P



Playback



Motion  
Detection



HD

# 4K NVR Systems

	<b>NEW</b>	<b>NEW</b>				
	<b>NVR3009E1P4</b>	<b>NVR3016E1P8</b>	<b>NVR3004DP</b>	<b>NVR3008DP</b>	<b>NVR3004CP</b>	<b>NVR3008CP</b>



<b>Video</b>	<b>Input</b>	9CH	16CH	9CH	16CH	9CH	16CH
	<b>Output</b>	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD
<b>Audio</b>	<b>Input</b>	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA
	<b>Output</b>	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)
<b>Alarm</b>	<b>Sensor Input</b>	4	4	4	4	4	4
	<b>Output</b>	1	1	1	1	1	1
<b>Display</b>	<b>HD Output</b>	Resolution:4K(3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz					
<b>Recording</b>	<b>Resolution</b>	4k(3840 × 2160),5MP(2592 × 1944),4MP(2688 × 1520/2560 × 1440),3MP(2048 × 1536),1080P(1920 × 1080),960P(1280×960),720P(1280 × 720),D1(720 × 576/720 × 480)					
	<b>Record Rate</b>	PAL: :4K@8x25fps,5MP@9 × 25fp,4MP@9x25fp,3MP@9 × 25fp,1080P@9 × 25fp,960P@9 × 25fp,720P@9 × 25fp, D1@9 × 25fp	PAL: :4K@10x25fps,5MP@16 × 25fp,4MP@16x25fp,3MP@16 × 25fp,1080P@16 × 25fp,960P@16 × 25fp,720P@16 × 25fp, D1@16 × 25fp	PAL: 4K@8x25fps,5MP@9 × 25fp,4MP@9x25fp,3MP@9 × 25fp,1080P@9 × 25fp,960P@9 × 25fp,720P@9 × 25fp, D1@9 × 25fp	PAL: 4K@10x25fps,5MP@16 × 25fp,4MP@16x25fp,3MP@16 × 25fp,1080P@16 × 25fp,960P@16 × 25fp,720P@16 × 25fp, D1@16 × 25fp	PAL: 4K@8x25fps,5MP@9 × 25fp,4MP@9x25fp,3MP@9 × 25fp,1080P@9 × 25fp,960P@9 × 25fp,720P@9 × 25fp, D1@9 × 25fp	PAL: 4K@10x25fps,5MP@16 × 25fp,4MP@16x25fp,3MP@16 × 25fp,1080P@16 × 25fp,960P@16 × 25fp,720P@16 × 25fp, D1@16 × 25fp
<b>Playback &amp; Backup</b>	<b>Local Sync Playback</b>	1CH 4K@30fps, 1CH 5MP@30fps,2CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@30fps,6CH 960P@30fps, 8CH 720P@30fps,9CH D1@30fps					
	<b>Decode Capability</b>	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps
<b>Network</b>	<b>Interface</b>	4xRJ-45 10/100Mbps	8xRJ-45 10/100Mbps	5xRJ-45 10/100/1000Mbps	8 × RJ45 10/100Mbps + 1xRJ-45 10/100Mbps	5xRJ-45 10/100/1000Mbps	8 × RJ45 10/100Mbps + 1xRJ-45 10/100Mbps
	<b>Incoming Bandwidth</b>	80MB	120MB	80MB	100MB	80MB	100MB
<b>Storage</b>	<b>Interface Type</b>	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB
	<b>USB Interface</b>	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0
	<b>RS485</b>	N/A	N/A	N/A	N/A	N/A	N/A

Record

NVR Value Series

NVR Pro Series

XVR Value Series

XVR Pro Series

# 4K NVR Systems



		NVR3009E1	NVR3016E1	NVR3009D	NVR3016D	NVR3009C	NVR3016C
Video	Input	9CH	16CH	9CH	16CH	9CH	16CH
	Output	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD	1 VGA, 1 HD
Audio	Input	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA	1 Port RCA
	Output	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)
Alarm	Sensor Input	4	4	NO	4	NO	4
	Output	1	1	NO	1	NO	1
Display	HD Output	Resolution:4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz					
Recording	Resolution	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz					
	Record Rate	PAL :4K@8x25fps,5MP@9×25fp,4MP@9x25fp,3MP@9×25fp,1080P@9×25fp,960P@9×25fp,720P@9×25fp, D1@9×25fp	PAL :4K@10x25fps,5MP@16×25fp,4MP@16x25fp,3MP@16×25fp,1080P@16×25fp,960P@16×25fp,720P@16×25fp, D1@16×25fp	PAL :4K@8x25fps,5MP@9×25fp,4MP@9x25fp,3MP@9×25fp,1080P@9×25fp,960P@9×25fp,720P@9×25fp, D1@9×25fp	PAL :4K@10x25fps,5MP@16×25fp,4MP@16x25fp,3MP@16×25fp,1080P@16×25fp,960P@16×25fp,720P@16×25fp, D1@16×25fp	PAL :4K@8x25fps,5MP@9×25fp,4MP@9x25fp,3MP@9×25fp,1080P@9×25fp,960P@9×25fp,720P@9×25fp, D1@9×25fp	PAL :4K@10x25fps,5MP@16×25fp,4MP@16x25fp,3MP@16×25fp,1080P@16×25fp,960P@16×25fp,720P@16×25fp, D1@16×25fp
Playback & Backup	Local Sync Playback	1CH 4K@30fps, 1CH 5MP@30fps,2CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@30fps,6CH 960P@30fps, 8CH 720P@30fps,9CH D1@30fps					
	Decode Capability	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps	4CH 1080P@30fps
Network	Interface	1xRJ45 10M/100MAdaptive Ethernet Interface	1xRJ45 10M/100MAdaptive Ethernet Interface	5xRJ-45 10/100/1000Mbps	8 × RJ45 10/100Mbps + 1xRJ-45 10/100Mbps	5xRJ-45 10/100/1000Mbps	8 × RJ45 10/100Mbps + 1xRJ-45 10/100Mbps
	Incoming Bandwidth	80MB	120MB	80MB	100MB	80MB	100MB
Storage	Interface Type	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB	1 SATA Up to 8TB
	USB Interface	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0	2 USB 2.0
	RS485	N/A	N/A	N/A	N/A	N/A	N/A

Coming Soon



NVR3109E1P4



NVR3116E1P8



NVR3109E1



NVR3116E1

Record

NVR Value Series

NVR Pro Series

XVR Value Series

XVR Pro Series

# 4K NVR Systems

NEW

NEW

NVR3332E2

NVR3332E2P16



<b>Video</b>	Input	32CH	32CH
	Output	1 VGA, 1 HD	1 VGA, 1 HD
<b>Audio</b>	Input	1 Port RCA	1 Port RCA
	Output	1 Port RCA(Linear, 1kΩ)	1 Port RCA(Linear, 1kΩ)
<b>Alarm</b>	Sensor Input	4	4
	Output	1	1
<b>Display</b>	HD Output	Resolution:4K (3840 × 2160/30Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz)	
	Resolution	12MP(4000*3000),8MP(3840 × 2160),5MP(2592 × 1944),4MP(2688 × 1520/2560 × 1440),3MP(2048 × 1536),1080P(1920 × 1080),960P(1280x960),720P(1280 × 720),D1 (720 × 576/720 × 480)	
<b>Recording</b>	Record Rate	PAL :12MP@32x25fps,8MP@32x25fps,5MP@32 × 25fp,4MP@32x25fp,3MP@32 × 25fp,1080P@32 × 25fp, 960P@32 × 25fp,720P@32 × 25fp, D1@32 × 25fp	PAL :4K@10x25fps,5MP@16 × 25fp,4MP@16x25fp,3MP@16 × 25fp,1080P@16 × 25fp, 960P@16 × 25fp,720P@16 × 25fp, D1@16 × 25fp
	Local Sync Playback	3CH 12MP@30fps,4CH 8MP@30fps,8CH 4MP@30fps, 16CH 1080P@30fps, 16CH 960P@30fps, 16CH 720P@30fps,16CH D1@30fps	
<b>Playback &amp; Backup</b>	Decode Capability	1080P(1920x1080)@480fps	1080P(1920x1080)@480fps
	Interface	1xRJ45 10M/100/1000MAdaptive Ethernet Interface	
<b>Network</b>	Incoming Bandwidth	320Mb	320Mb
	Interface Type	2SATA Up to 10TB	
<b>Storage</b>	USB Interface	2 USB 2.0	
	RS485	N/A	

Coming Soon

16CH 12MP  
2\*SATA  
1\*ESATA



NVR3216E2

32CH 12MP  
2\*SATA



NVR3232E2

32CH 12MP  
4\*SATA  
1\*ESATA



NVR3332K4

32CH 12MP  
8\*SATA  
1\*ESATA



NVR3332K8

64CH 12MP  
8\*SATA  
1\*ESATA




NVR3664K8

16CH 12MP  
2\*SATA  
1\*ESATA  
16\*PoE



NVR3216E2P16

32CH 12MP  
2\*SATA  
1\*ESATA  
16\*PoE



NVR3332E2P16

32CH 12MP  
4\*SATA  
1\*ESATA  
24\*PoE



NVR3332K4P24

32CH 12MP  
8\*SATA  
1\*ESATA  
16\*PoE



NVR3332K8P16

64CH 12MP  
8\*SATA  
1\*ESATA  
16\*PoE



NVR3664K8P16



5-IN-1

# XVVR

CVBS

CVI

IP

TVI

AHD



# 5M-N XVR Systems

XVRT3004D

XVRT3008D

XVRF5016D

XVRF5016DB

XVRT3004C

XVRT3008C

XVRF5016C

XVRF5016CB



	XVRT3004D	XVRT3008D	XVRF5016D	XVRF5016DB	XVRT3004C	XVRT3008C	XVRF5016C	XVRF5016CB
<b>Resolution</b>	5M-N	5M-N	5M-N	5M-N	5M-N	5M-N	5M-N	5M-N
<b>Channel</b>	4CH	8CH	16CH	16CH	4CH	8CH	16CH	16CH
<b>BNC Video In</b>	4CH	8CH	16CH	16CH	4CH	8CH	16CH	16CH
<b>IP Video In</b>	9CH	16CH	16CH	16CH	9CH	16CH	16CH	16CH
<b>Playback</b>	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH
<b>Alarm</b>	1CH/ 1 CH	1CH/ 1 CH	2 CH/ 1 CH	6CH/ 1 CH	1CH/ 1 CH	1CH/ 1 CH	2 CH/ 1 CH	6CH/ 1 CH
<b>Audio</b>	N/A	N/A	N/A	4 CH/ 1 CH	N/A	N/A	N/A	4 CH/ 1 CH
<b>Hard Disk</b>	1*SATA	1*SATA	1*SATA	2*SATA	1*SATA	1*SATA	1*SATA	2*SATA
<b>AI Face Comparison</b>	N/A	N/A	Yes	Yes	N/A	N/A	Yes	Yes
<b>Compression Format</b>	H.264/H.265	H.264+/H.265+	H.264+/H.265+	H.264+/H.265+	H.264/H.265	H.264+/H.265+	H.264+/H.265+	H.264+/H.265+
<b>Interface</b>	4*BNC,1*RJ45,2*USB,1*RS485	8*BNC,1*CVBS,1*RJ45,2*USB,1*RS485	16*BNC,1*CVBS1*RJ45,2*USB,1*RS485	16*BNC,1*CVBS1*RJ45,2*USB,1*RS485	4*BNC,1*RJ45,2*USB,1*RS485	8*BNC,1*CVBS,1*RJ45,2*USB,1*RS485	16*BNC,1*CVBS1*RJ45,2*USB,1*RS485	16*BNC,1*CVBS1*RJ45,2*USB,1*RS485
<b>Recording Resolution</b>	5M-N@8fps, 1080N@18fps	5M-N@6fps, 1080N@15fps	5M-N@8fps, 1080N@15fps	5M-N@8fps, 1080N@15fps	5M-N@8fps, 1080N@18fps	5M-N@6fps, 1080N@15fps	5M-N@8fps, 1080N@15fps	5M-N@8fps, 1080N@15fps

Record

NVR Value Series

NVR Pro Series

XVR Value Series

XVR Pro Series

# 8M-N/4K XVR Systems

XVRT3004HD	XVRF5008HD	XVRT3004HC	XVRF5008HC	XVRF5004D	XVRF5004C
------------	------------	------------	------------	-----------	-----------



<b>Resolution</b>	8M-N	8M-N	8M-N	8M-N	4K	4K
<b>Channel</b>	4CH	8CH	4CH	8CH	4CH	4CH
<b>BNC Video In</b>	4CH	8CH	4CH	8CH	4CH	4CH
<b>IP Video In</b>	16CH	16CH	16CH	16CH	16CH	16CH
<b>Playback</b>	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH	4 CH/ 1 CH
<b>Alarm</b>	4CH	4CH	4CH	4CH	4CH	4CH
<b>Audio</b>	2CH	6CH	2CH	6CH	4CH	4CH
<b>Hard Disk</b>	1*SATA	1*SATA	1*SATA	1*SATA	1*SATA	1*SATA
<b>AI Face Comparison</b>	N/A	Yes	N/A	Yes	4CH	4CH
<b>Compression Format</b>	H.264/H.265	H.264/H.265	H.264/H.265	H.264/H.265	H.264+/H.265+	H.264+/H.265+
<b>Interface</b>	4*BNC, 1*CVBS, 1*RJ45, 2*USB, 1*RS485	8*BNC, 1*CVBS, 1*RJ45, 2*USB, 1*RS485	4*BNC, 1*CVBS, 1*RJ45, 2*USB, 1*RS485	8*BNC, 1*CVBS, 1*RJ45, 2*USB, 1*RS485	4*BNC, 1*HD, 1*VGA, 1*CVBS, 1*RJ45, 2*USB, 1*RS485	4*BNC, 1*HD, 1*VGA, 1*CVBS, 1*RJ45, 2*USB, 1*RS485
<b>Recording Resolution</b>	8M-N@8fps, 5M-N@10fps, 5M@6fps, 2M@15fps	8M-N@6fps, 5M-N@12.5fps, 5M@6fps, 2M@15fps	8M-N@8fps, 5M-N@10fps, 5M@6fps, 2M@15fps	8M-N@6fps, 5M-N@12.5fps, 5M@6fps, 2M@15fps	8M@8fps, 5M@12.5fps, 2M@30fps	8M@8fps, 5M@12.5fps, 2M@30fps

Record


NVR Value Series

NVR Pro Series

XVR Value Series

XVR Pro Series

Coming Soon

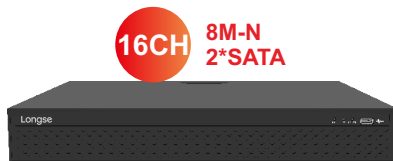

XVRDA7016HDB




XVRDA7008DB



XVRDA7008CB

# Wi-Fi

## Security Systems



H.265+/H.264+



Plug&Play



Wifi



2CH 2MP 5MP



4CH 2MP 5MP



2CH 2MP 5MP



4CH 2MP 5MP





# POE

## Security Systems



4CH 5MP 4K



4CH 5MP 4K



4CH 5MP 4K



6CH 5MP 4K



6CH 5MP 4K



6CH 5MP 4K



8CH 5MP 4K



8CH 5MP 4K



8CH 5MP 4K

DIY kits

Wi-Fi kits

POE kits

Full Color XVR kits

XVR kits

# Full Color XVR Security Systems



DIY kits

Wi-Fi kits

POE kits

Full Color XVR kits

XVR kits



AOC AOC  
2MP 5MP 8MP



AOC AOC  
2MP 5MP 8MP



AOC AOC  
2MP 5MP 8MP



AOC AOC  
2MP 5MP 8MP



AOC AOC  
2MP 5MP 8MP



AOC AOC  
2MP 5MP 8MP



# 5 IN 1

## XVR Security Systems

- IP
- AHD
- CVI
- TVI
- CVBS



DIY kits

Wi-Fi kits

POE kits

Full Color XVR kits

XVR kits



AHD

# FULL COLOR

## Analog Security Cameras



Full Color



White Light  
Warning



4 IN 1  
AHD/CVI/TVI/CVBS



WDR



3D NR



# 2MP / 2MP-AF / 5MP / 5MP-AF / 8MP / 8MP-AF Full Color Analog Security Cameras

		2MP 200FPEW	2MP 200ESHW 2MP-AF 2005XESHW	5MP 500FKEW	5MP 500ESLW 5MP-AF 5005XESLW	8MP 800ESW 8MP-AF 8004XESW
Camera	<b>Image Sensor</b>	1/3" CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.5" CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	<b>Image Resolution</b>	5M:2592*1944	5M:2592*1944	8M:3840*2160	8M:3840*2160	8M:3840*2160
	<b>Video Output Mode</b>	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M@2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M@2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M@2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M@2M@30fps/25fps
	<b>TV System</b>	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC
	<b>Electronic Shutter</b>	Auto	Auto	Auto	Auto	Auto
	<b>Minimum Illumination</b>	Color : 0.03 lux@F2.0, 0 Lux with white light	Color : 0.001 lux@F1.6, 0 Lux with white light	Color : 0.03 lux@F2.0, 0 Lux with white light	Color : 0.003 lux@F1.6, 0 Lux with white light	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 Lux with IR
	<b>Scanning System</b>	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	<b>IR Cut Filter</b>	YES	YES	YES	YES	YES
	<b>Infrared LED</b>	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)
	<b>IR Status</b>	AGC auto control	AGC auto control	AGC auto control	AGC auto control	AGC auto control
Camera Features	<b>Starlight</b>	N/A	N/A	N/A	N/A	N/A
	<b>Day/Night</b>	Color	Color	Color	Color	Color
	<b>OSD Menu</b>	YES	YES	YES	YES	YES
	<b>WDR</b>	DWDR	120dB	DWDR	120dB	120dB
	<b>UTC</b>	YES	YES	YES	YES	YES
	<b>Noise Reduction</b>	3DNR	AI-DNR	DNR	3DNR	3DNR
	<b>Coaxial Audio</b>	YES(only TVI )	N/A	YES(only TVI )	YES(only TVI )	YES(only TVI )
	<b>White Balance</b>	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	<b>Gain Control</b>	AUTO	AUTO	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

# AHD

## Analog Security Cameras



4 IN 1  
AHD/CVI/TVI/CVBS



WDR



Starlight



IP67



OSD&UTC



3D NR



## 2MP/5MP Analog Security Cameras

		2MP 200F	2MP 200FPE	5MP 500FKE
Camera	Image Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor
	Image Resolution	2M:1920*1080	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI/CVI: 2M@30fps/25fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 4M@30fps/25fps, 2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimum Illumination	Color : 0.01 lux@F2.0, AGC ON; B/W : 0 lux with IR	Color : 0.03 lux@F2.0, AGC ON; B/W : 0 lux with IR	Color : 0.03 lux@F2.0, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	YES
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	DWDR	DWDR	DWDR
	UTC	YES	YES	YES
	Noise Reduction	3DNR	DNR	DNR
	Coaxial Audio	N/A	YES(only TVI )	YES(only TVI )
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

# 2MP/5MP/8MP Analog Security Cameras

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

		2MP 200ESH	5MP 500ESL	8MP 800ES
Camera	Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	Image Resolution	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimum Illumination	Color : 0.001 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.003 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	N/A
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	120dB	120dB	120dB
	UTC	YES	YES	YES
	Noise Reduction	AI-DNR	3DNR	3DNR
	Coaxial Audio	N/A	N/A	N/A
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

# 2MP-AF/5MP-AF/8MP-AF Analog Security Cameras

		2MP-AF 2005XESH	5MP-AF 5005XESL	8MP-AF 8004XES
Camera	Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	Image Resolution	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimun Illumination	Color : 0.001 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.003 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	N/A
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	120dB	120dB	120dB
	UTC	YES	YES	YES
	Noise Reduction	AI-DNR	3DNR	3DNR
	Coaxial Audio	N/A	N/A	N/A
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

TVI

4000K  
Warm light

# FULL COLOR

## Analog Security Cameras



Full Color



White Light  
Warning



4 IN 1  
AHD/CVI/TVI/CVBS



WDR



3D NR



# 2MP / 2MP-AF / 5MP / 5MP-AF / 8MP / 8MP-AF Full Color Analog Security Cameras

		2MP 200FPEW	2MP 200ESHW 2MP-AF 2005XESHW	5MP 500FKEW	5MP 500ESLW 5MP-AF 5005XESLW	8MP 800ESW 8MP-AF 8004XESW
Camera	Image Sensor	1/3" CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.5" CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	Image Resolution	5M:2592*1944	5M:2592*1944	8M:3840*2160	8M:3840*2160	8M:3840*2160
	Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto	Auto	Auto
	Minimum Illumination	Color : 0.03 lux@F2.0, 0 Lux with white light	Color : 0.001 lux@F1.6, 0 Lux with white light	Color : 0.03 lux@F2.0, 0 Lux with white light	Color : 0.003 lux@F1.6, 0 Lux with white light	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES	YES	YES
	Infrared LED	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)	NO, Support Warm white (4000K)
	IR Status	AGC auto control	AGC auto control	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	N/A	N/A	N/A
	Day/Night	Color	Color	Color	Color	Color
	OSD Menu	YES	YES	YES	YES	YES
	WDR	DWDR	120dB	DWDR	120dB	120dB
	UTC	YES	YES	YES	YES	YES
	Noise Reduction	3DNR	AI-DNR	DNR	3DNR	3DNR
	Coaxial Audio	YES(only TVI)	N/A	YES(only TVI)	YES(only TVI)	YES(only TVI)
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI



# TVI

## Analog Security Cameras



4 IN 1  
AHD/CVI/TVI/CVBS



WDR



Starlight



IP67



OSD&UTC



3D NR



AOC



## 2MP/5MP Analog Security Cameras

		2MP 200F	2MP 200FPE	5MP 500FPE
Camera	Image Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor
	Image Resolution	2M:1920*1080	5M:2592*1944 4M:2560*1440 2M:1920*1080	5M:2592*1944 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI/CVI: 2M@30fps/25fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 4M@30fps/25fps, 2M@30fps/25fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 4M@30fps/25fps, 2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimun Illumination	Color : 0.01 lux@F2.0, AGC ON; B/W : 0 lux with IR	Color : 0.03 lux@F2.0, AGC ON; B/W : 0 lux with IR	Color : 0.03 lux@F2.0, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	YES
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	DWDR	DWDR	DWDR
	UTC	YES	YES	YES
	Noise Reduction	3DNR	DNR	DNR
	Coaxial Audio	N/A	YES(only TVI )	YES(only TVI )
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

# 2MP/5MP/8MP Analog Security Cameras

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

		2MP 200ESH	5MP 500ESL	8MP 800ES
Camera	Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	Image Resolution	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimum Illumination	Color : 0.001 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.003 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	N/A
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	120dB	120dB	120dB
	UTC	YES	YES	YES
	Noise Reduction	AI-DNR	3DNR	3DNR
	Coaxial Audio	N/A	N/A	N/A
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

# 2MP-AF/5MP-AF/8MP-AF Analog Security Cameras

		2MP-AF 2005XESH	5MP-AF 5005XESL	8MP-AF 8004XES
Camera	<b>Image Sensor</b>	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	<b>Image Resolution</b>	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080
	<b>Video Output Mode</b>	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps	AHD: 8M@15fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps; TVI: 8M@15fps/12.5fps, 5M@20fps/12.5fps, 4M/2M@30fps/25fps;	AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	<b>TV System</b>	PAL/NTSC	PAL/NTSC	PAL/NTSC
	<b>Electronic Shutter</b>	Auto	Auto	Auto
	<b>Minimun Illumination</b>	Color : 0.001 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.003 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	<b>Scanning System</b>	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	<b>IR Cut Filter</b>	YES	YES	YES
	<b>IR Status</b>	AGC auto control	AGC auto control	AGC auto control
Camera Features	<b>Starlight</b>	N/A	N/A	N/A
	<b>Day/Night</b>	YES/NO	YES/NO	YES/NO
	<b>OSD Menu</b>	YES	YES	YES
	<b>WDR</b>	120dB	120dB	120dB
	<b>UTC</b>	YES	YES	YES
	<b>Noise Reduction</b>	AI-DNR	3DNR	3DNR
	<b>Coaxial Audio</b>	N/A	N/A	N/A
	<b>White Balance</b>	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	<b>Gain Control</b>	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro


TVI Full Color

TVI Value

TVI Pro

Eco

SDI

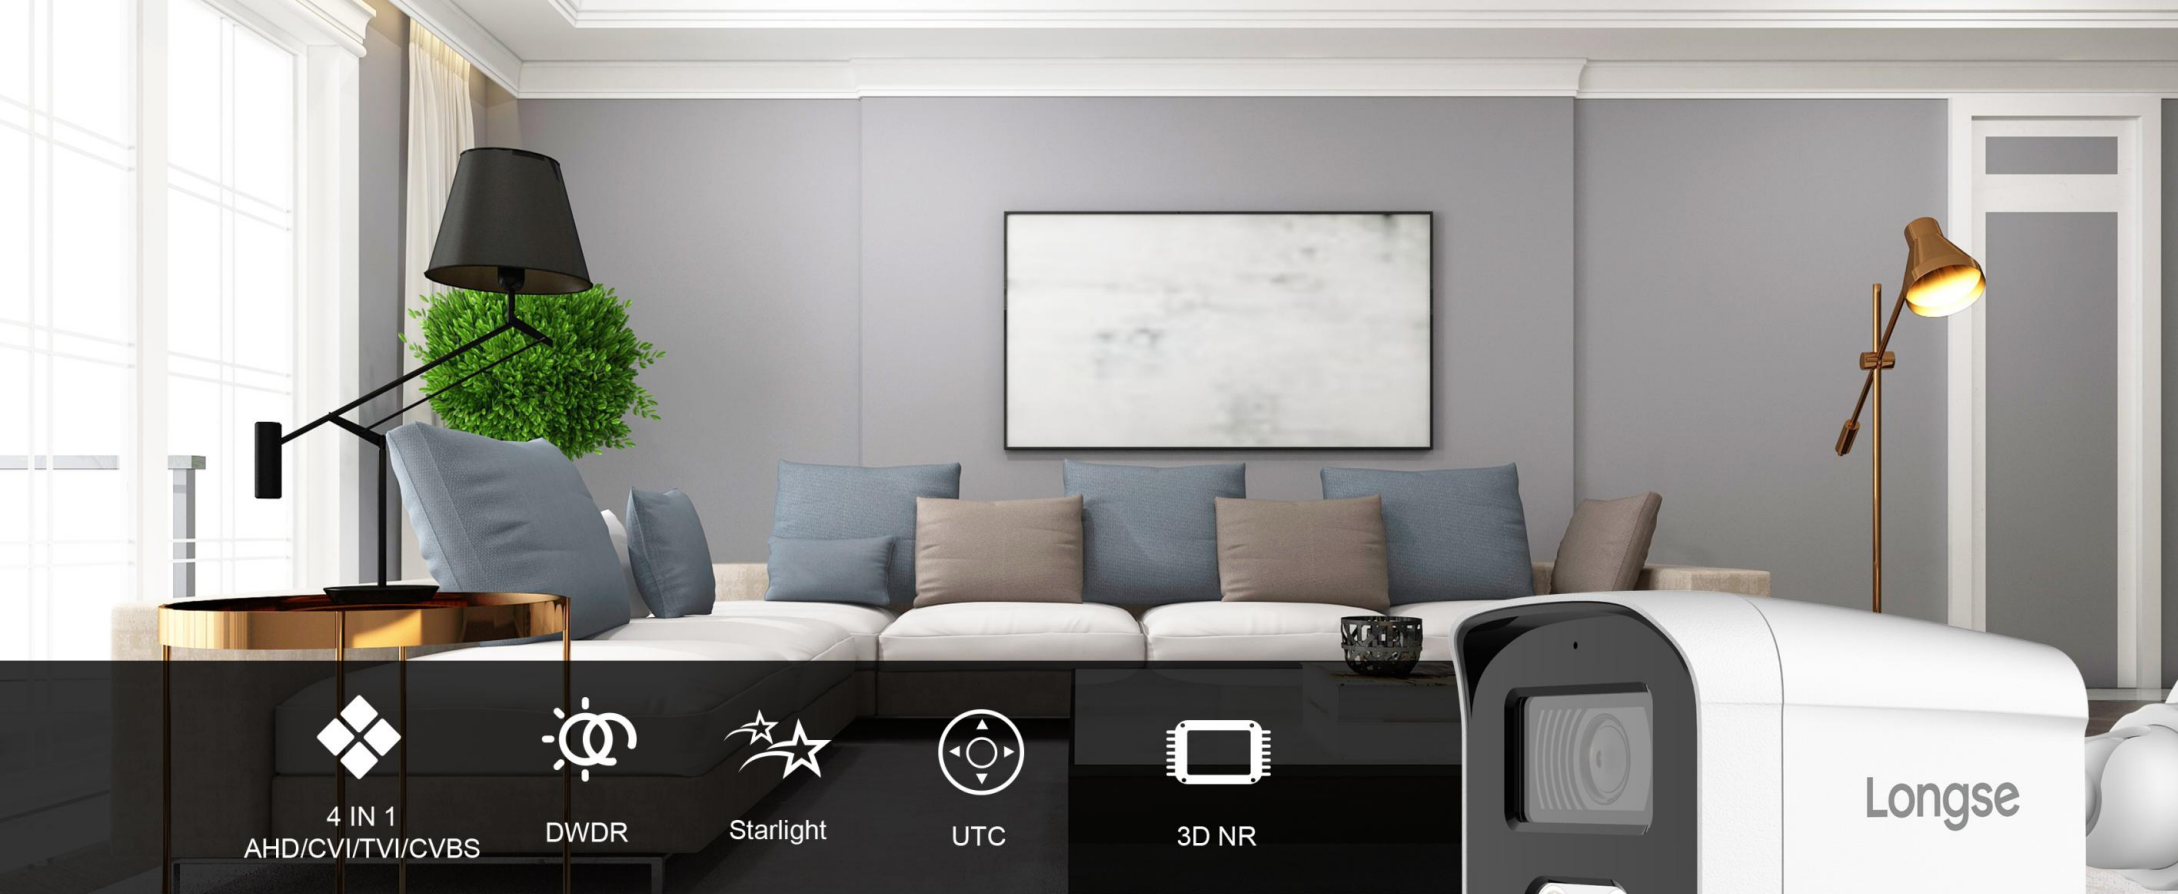

**ECO**

Analog Security Cameras

# 2MP/5MP Analog Security Cameras

		2MP 200F (ECO)	2MP 200FW (ECO)	5MP 500FPE (ECO)	5MP 500FPEW (ECO)
Camera	Image Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor	1/3" CMOS Sensor
	Image Resolution	2M:1920*1080	2M:1920*1080	5M:2592*1944 4M:2560*1440 2M:1920*1080	5M:2592*1944 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI/CVI: 2M@30fps/25fps	AHD/TVI/CVI: 2M@30fps/25fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 4M@30fps/25fps, 2M@30fps/25fps	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/25fps/15fps, 2M@30fps/25fps; CVI: 4M@30fps/25fps, 2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto	Auto
	Minimum Illumination	Color: 0.01 lux@F2.0, AGC ON; B/W: 0 lux with IR	Color: 0.01 lux@F2.0, AGC ON; B/W: 0 lux with IR	Color: 0.03 lux@F2.0, AGC ON; B/W: 0 lux with IR	Color: 0.03 lux@F2.0, AGC ON; B/W: 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	N/A	N/A	YES	YES
	Day/Night	YES/NO	Color	YES/NO	Color
	OSD Menu	NO	NO	NO	NO
	WDR	DWDR	DWDR	DWDR	DWDR
	UTC	YES	YES	YES	YES
	Noise Reduction	3DNR	3DNR	DNR	DNR
	Coaxial Audio	N/A	N/A	YES(only TVI)	YES(only TVI)
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value


TVI Pro

Eco

SDI

# SDI

## Analog Security Cameras



# 2MP / 2MP-AF / 4MP / 4MP-AF / 8MP / 8MP-AF Analog Security Cameras

		2MP TE200SH   2MP-AF TE2005XSH	4MP HD400ESL   4MP-AF HD4005XESL	8MP HD800ES   8MP-AF HD8004XES
Camera	Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor	1/2.8" SONY CMOS sensor
	Image Resolution	5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 5M:2592*1944 4M:2560*1440 2M:1920*1080	8M:3840*2160 4M:2560*1440 2M:1920*1080
	Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps, 2M@30fps; CVI: 4M@30fps, 2M@30fps; EX-SDI: 4M/2M@30fps/25fps 2M@60fps/50fps 2M@30fps/25fps 720P@60fps/50fps 720P@30fps/25fps HD-SDI: 2M@30fps/25fps 720P@30fps/25fps	EX-SDI: 8M@15fps, 4M/2M@30fps/25fps; HD-SDI: 2M@30fps/25fps; AHD/TVI: 5M@20fps/12.5fps, 4M/2M@30fps/25fps; CVI: 4M/2M@30fps/25fps;	EX-SDI: 8M@15fps, 4M/2M@30fps/25fps; HD-SDI: 2M@30fps/25fps; AHD/TVI/CVI: 8M@15fps/12.5fps, 4M/2M@30fps/25fps
	TV System	PAL/NTSC	PAL/NTSC	PAL/NTSC
	Electronic Shutter	Auto	Auto	Auto
	Minimum Illumination	Color : 0.001 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.003 lux@F1.6, AGC ON; B/W : 0 lux with IR	Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR
	Scanning System	Progressive Scan	Progressive Scan	Progressive Scan
Night Vision	IR Cut Filter	YES	YES	YES
	IR Status	AGC auto control	AGC auto control	AGC auto control
Camera Features	Starlight	YES	N/A	N/A
	Day/Night	YES/NO	YES/NO	YES/NO
	OSD Menu	YES	YES	YES
	WDR	120dB	120dB	120dB
	UTC	YES	YES	YES
	Noise Reduction	AI-DNR	3DNR	3DNR
	White Balance	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL
	Gain Control	AUTO	AUTO	AUTO

HD Camera

AHD Full Color

AHD Value

AHD Pro

TVI Full Color

TVI Value

TVI Pro

Eco

SDI

# PTZ


## Security Cameras



Smart Analytics



Zoom In/Out



360° View



H.265+/H.265



3D NR



Starlight



DWDR



IP67





# PTZ PRODUCT FAMILY

## Speed Dome



PT4A



PT5A



PT6B



PT6A



PT7K



PT10G

## Mini PTZ



PTDA



PTDK

# 2MP/5MP AI/IP PTZ Security Cameras

PTZ Camera

IP PTZ Camera

HD PTZ Camera

	2MP IGC200	2MP GC200	5MP IGL500	5MP GL500
<b>Camera</b>	<b>Image Sensor</b>	1/2.9" Progressive Scan CMOS Sensor	1/2.9" Progressive Scan CMOS Sensor	1/2.9" Progressive Scan CMOS Sensor
	<b>Resolution</b>	2MP	2MP	5MP
	<b>Compression</b>	H.264/H.264+ /H.265/MJPEG	H.264/H.264+ /H.265/MJPEG	H.264/H.264+ /H.265/MJPEG
	<b>Minimum Illumination</b>	Color: 0.008 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.008 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR	Color: 0.008 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
	<b>S/N Ratio</b>	>50db	>50db	>60db
<b>Network</b>	<b>Network interface</b>	Built-in RJ45 network interface, support 10M/100M IP DATA	Built-in RJ45 network interface, support 10M/100M IP DATA	Built-in RJ45 network interface, support 10M/100M IP DATA
	<b>Main Stream 1</b>	1920*1080@30fps	1920*1080@30fps	5MP(2592*1944)@20fps
	<b>Main Stream 2</b>	1280*720@30fps	1280*720@30fps	4MP(2560*1440)@25fps
	<b>Main Stream 3</b>	N/A	N/A	N/A
	<b>Main Stream 4</b>	N/A	N/A	N/A
	<b>Main Stream 5</b>	N/A	N/A	N/A
	<b>Main Stream 6</b>	N/A	N/A	N/A
	<b>Sub Stream 1</b>	D1(720*480)@20fps	D1(720*480)@20fps	D1(720*480)@20fps
	<b>Sub Stream 2</b>	CIF(352*288)@20fps	CIF(352*288)@20fps	CIF(352*288)@20fps
	<b>Sub Stream 3</b>	N/A	N/A	N/A
	<b>Sub Stream 4</b>	N/A	N/A	N/A
<b>AI Function</b>	<b>Smart Analytic</b>	Intrusion Detetion, motion detection based on human detection, Sound Alarm	Intrusion Detetion, motion detection based on human detection	Intrusion Detetion, motion detection based on human detection, Sound Alarm
	<b>Tracking effective range</b>	5 ~ 45M Speed: 3 ~ 12KM/h	N/A	5 ~ 45M Speed: 3 ~ 12KM/h
<b>Interface</b>	<b>Audio</b>	2-Way Audio	2-Way Audio	2-Way Audio
	<b>Alarm</b>	N/A	N/A	N/A
	<b>SD Card Slot</b>	N/A	N/A	N/A
	<b>POE</b>	Optional	Optional	Optional

**PTDA**

2MP  

5MP 



**PTDK**

2MP  

5MP  



**PT4A**

2MP 



**PT5A**

2MP 

5MP 



**PT6A**

2MP  

5MP 



**PT6B**

2MP  

5MP 



**PT7K**

2MP 

5MP  



**PT10G**

2MP  

5MP  



## 2MP/5MP AI/IP PTZ Security Cameras

		2MP HTC200NS	5MP HTC500NS
Camera	Image Sensor	1/2.9" SONY 2.1MP CMOS Sensor	1/2.7" OV 5MP CMOS Sensor
	Resolution	2MP	5MP
	TV System	PAL/NTSC	PAL/NTSC
	S/N Ratio	>50db	>50db
Communication	UTC	Support	Support
	Rs485	Support	Support
Interface	Audio	N/A	N/A
	Alarm	N/A	N/A

PTZ Camera

IP PTZ Camera

HD PTZ Camera

PT5A

2MP/5MP 18X



PT7K

2MP 18X 33X



PTDA

2MP/5MP 4X



PTDK

2MP/5MP 4X 10X



# ACCESSORIES





POE Switch



Splitter Cable



Tester



Hard Disk



Camera Bracket



Camera Housing



CCTV Lens



Lan Cable



CCTV Cable



BNC Connector



Bracket




Monitor



Power Box



Power Adapter



LED Illuminator



HD Video Converter



## Longse Technology Limited

E-mail: [info@longse.com](mailto:info@longse.com)

Web: [www.longse.com](http://www.longse.com)

Tel: +86 20-66217333

Fax: +86 20-66217338

FULL COLOR  
**PRO** **VALUE**  
FACE RECOGNITION  
DEDICATION **WIFI** **AUDIO KITS**  
**SMART** **POE** **WIFI POE**