

Product Show

More Secure More Intelligent


July / 2023

Longse

ODDM

ODDM

One-Stop Service

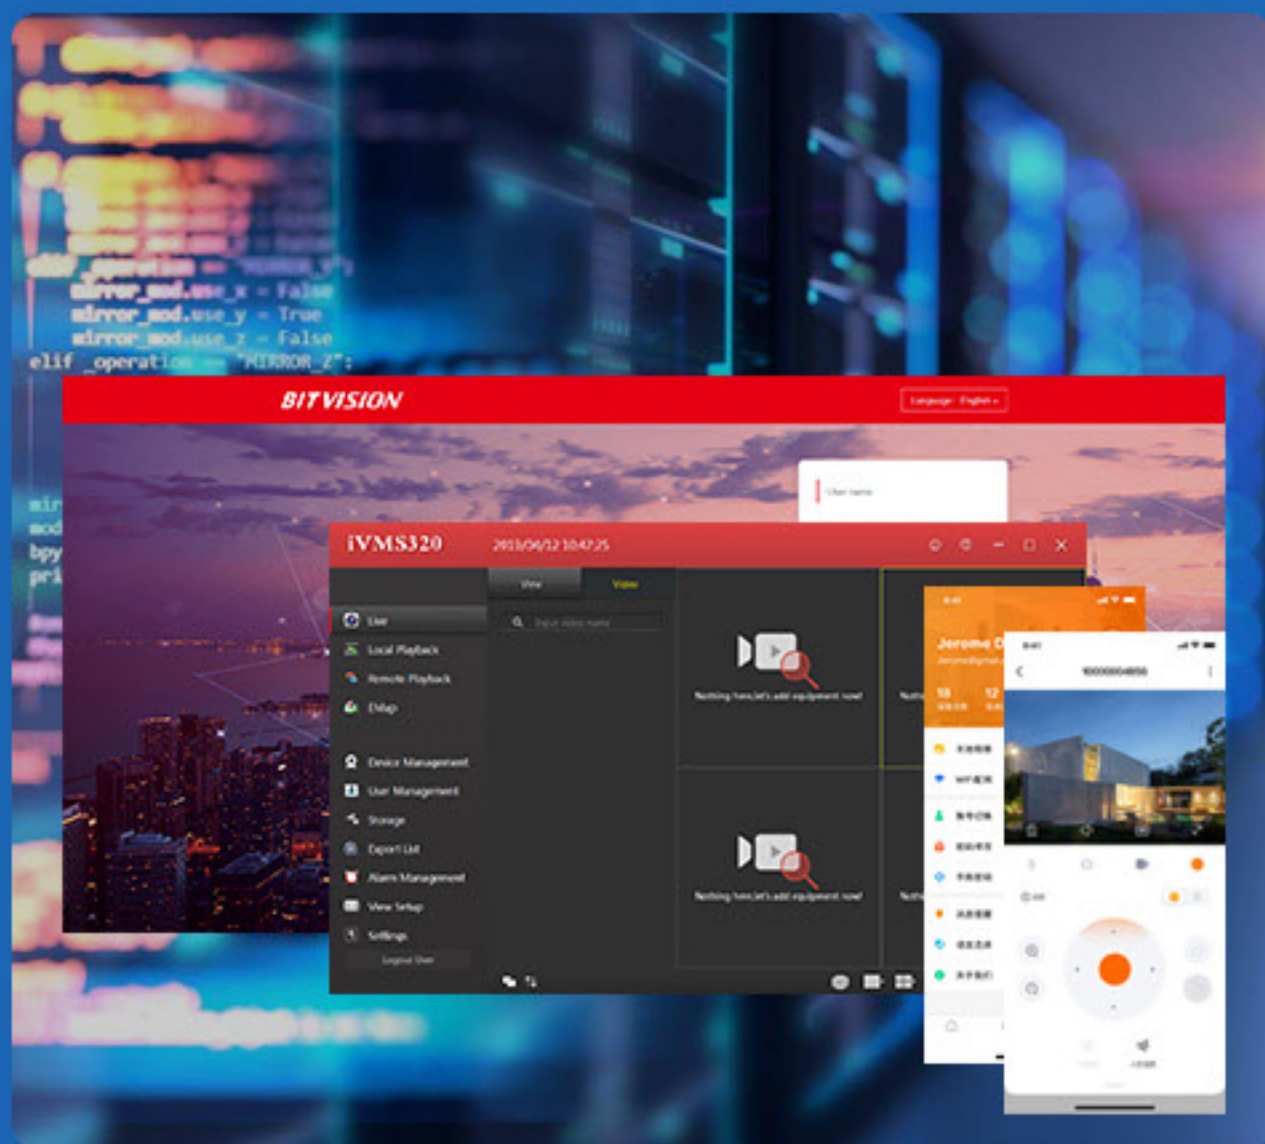

Hardware

Firmware

APP



Camera

Recorder

Accessories

Longse

RL200

2MP IPC Achieves 60fps

By boosting the video frame rate to 60fps, the visuals become smoother, and the video details become clearer.



2MP 60fps

2MP 30fps

Longse

PRO SERIES

XVR

Dual Hard Disk, 2*Max 8TB

XVRDA7016HDB



32CH IPC Input

16CH BNC Input

4CH/1CH Alarm I/O

6CH/1CH Audio I/O

2MP Value-IP Cameras

Support Intrusion Detection (Based on human shape detection)

Fullhan SOC

FG200/5XFG200

1/2.9" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream:
1080P/720P@30fps
3MP@30fps

NOVATEK SOC

KF200

1/2.8" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream: 1080P(1920*1080)@30fps
720P(1280*720)@30fps
D1(720*480)@30fps

ZMP

4MP Value-IP Cameras

Support Intrusion Detection (Based on human shape detection)

Fullhan SOC

FG400/5XFG400

1/3" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream: 4MP@30fps / 1080P@30fps / 720P@30fps



4MP

5MP Value-IP Cameras

Smart Analytics: Intrusion/ Line Crossing/Wandering/People Gathering Detection (Based on human shape detection); Vehicle Detection

NOVATEK SOC

KL500/5XKL500

1/3" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream: 4MP@30fps / 1080P@30fps / 720P@30fps



5MP



CMSE



CMLB



CMSC



LVDBH



LMDH



BMSA



BMSC



BMSC



BMMB



LBE

8MP Value-IP Cameras

KL800/5XKL800

8MP



NOVATEK SOC

1/2.8" Sony Sensor, WDR, Internal POE

2.8mm / 3.6mm(F1.6) / 6mm

Main Stream: 8MP@20fps / 4MP@20fps / 1080P@20fps / 720P@20fps

Smart Analytics

Intrusion/ Line Crossing/Wandering/People Gathering Detection

(Based on human shape detection)

Vehicle Detection



Intrusion Detection



Line Cross Detection



Wandering Detection



People Gather Detection



Vehicle Detection



CMSE



CMLB



CMSC



LVDBH



LMDH



BMSA



BMSC



BMMB



LBE

2MP Eco Series-IP Cameras

Support Intrusion Detection (Based on human shape detection)

Fullhan SOC

FG200

1/2.9" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream:

1080P/720P@30fps
3MP@30fps

GK7205V200 SOC

GC200

1/2.9" Progressive Scan CMOS
DWDR
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream:

4MP@30fps / 1080P@30fps / 720P@30fps

SALE

2MP

4MP Eco Series-IP Cameras

Support Intrusion Detection (Based on human shape detection)

Fullhan SOC

FG400

1/3" Progressive Scan CMOS
DWDR, Internal POE
2.8mm / 3.6mm(F1.6) / 6mm

Main Stream: 4MP@30fps / 1080P@30fps / 720P@30fps

SALE

4MP

Product Show



CMSB



CMSD



LIRDCA



BMSC



BMSC



LBF90

HD CAMERA

Limited Sales Promotion

SALE



CMSA

2M/5M

2M/5M Lite

CMSATHC200FPE

1/3" CMOS Sensor
2M (Default) / 5M Output
With IR-CUT, DWDR, DNR, OSD, UTC
TVI: 5M@20fps, 4M@30fps, 2M@30fps

5M/4K Lite

CMSATHC500FKE

1/2.5" CMOS Sensor
5M (Default) / 4K Output
2DNR, OSD, UTC, With IR-CUT
TVI: 8M@15fps, 5M@20fps, 4M/2M@30fps

Cost-effective Affordable

IR & Full Color HD Camera Series

CMSD

IP65
Metal + Plastic
IR Distance: 25m
Size: ϕ 107 x 88.3(H)mm



CMSB

IP67
Metal
IR Distance: 25m
Size: ϕ 96 x 91(H) mm




BPSC

IP66
Plastic
IR Distance: 20m
Size: 174(W) x 68(H) x 70(D)mm



BMSD

IP67
Metal + Plastic
IR Distance: 25m
Size: 176.6(W) x 67(H) x 70(D)mm

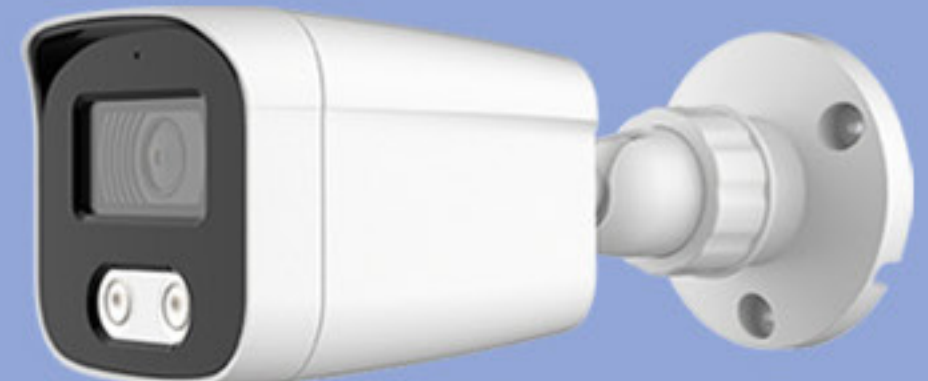

Eco Series

2M (AHD/CVI/TVI/CVBS)

HTC200F-ECO HTC200FW-ECO

1/3" CMOS Sensor
1080P/960H,
DWDR, 3D NR, UTC, With IR-CUT

2M/5M Lite (AHD/CVI/TVI)

HTC500FPE-ECO HTC500FPEW-ECO

1/3" CMOS Sensor
2M (Default) / 5M Output, With IR-CUT, DWDR, DNR, UTC
AHD: 5M@20fps, 4M@30fps, 2M@30fps

Full Color Series

2M/5M Lite (AHD/CVI/TVI)

THC200FPEW

1/3" CMOS Sensor
2M (Default) / 5M Output (AoC, Build-in Mic, Optional)
DWDR, DNR, MIRROR, OSD, UTC
TVI: 5M@20fps, 4M@30fps/25fps, 2M@30fps/25fps

5M/4K Lite (AHD/CVI/TVI/CVBS)

THC500FKEW

1/2.5" CMOS Sensor
5M (Default) / 4K Output (AoC, Build-in Mic, Optional)
2DNR, OSD, UTC, With IR-CUT
TVI: 8M@15fps, 5M@20fps, 4M/2M@30fps

AHD/TVI Series

2M/5M Lite (AHD/CVI/TVI)

THC200FPE

1/3" CMOS Sensor
2M (Default) / 5M Output,
With IR-CUT, DWDR, DNR, OSD, UTC
TVI: 5M@20fps, 4M@30fps, 2M@30fps

5M/4K Lite (AHD/CVI/TVI/CVBS)

THC500FKE

1/2.5" CMOS Sensor
5M (Default) / 4K Output,
2DNR, OSD, UTC, With IR-CUT
TVI: 8M@15fps, 5M@20fps, 4M/2M@30fps

IPC SERIES

VALUE SERIES

Support Intrusion Detection (Based on Human Shape Detection)

FULLHAN SOC

2MP 1/2.9" Progressive Scan CMOS
DWDR, With IR-CUT, With Internal POE
Main Stream: 1080P/720P@30fps / 3MP@30fps

4MP 1/3" Progressive Scan CMOS
DWDR, With Internal POE
Main Stream: 4MP@30fps / 1080P@30fps / 720P@30fps


NOVATEK SOC

2MP 1/2.8" Progressive Scan CMOS
WDR, With IR-CUT
Main Stream: 1080P(1920*1080)@30fps

5MP 1/2.8" Sony Sensor
WDR, With Internal POE
Main Stream: 5MP@30fps / 4MP@30fps / 1080P@30fps / 720P@30fps

8MP 1/2.8" Sony Sensor
WDR, With Internal POE
Main Stream: 8MP@20fps / 4MP@20fps / 1080P@20fps / 720P@20fps

Cost-effective

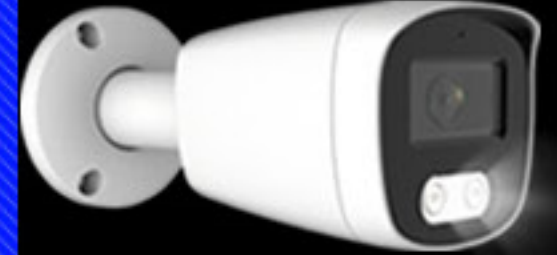

FULL COLOR SERIES

Support Intrusion Detection (Based on Human Shape Detection)

FULLHAN SOC
2MP / 4MP

NOVATEK SOC
2MP / 5MP / 8MP

ROCKCHIP SOC
2MP / 5MP / 8MP



SMART ANALYTICS



PRO SERIES

Intrusion / Line Crossing / Wandering / People Gathering Detection (Based on Human Shape Detection), Vehicle Detection

ROCKCHIP SOC

2MP 1/2.8" SONY Sensor
120dB WDR, Starvis
Main Stream: 1080P@30fps / 60fps, 3MP@25fps
With Internal POE, **Build in 4G storage**

4MP 1/2.8" SONY Sensor
120dB WDR / 140dB WDR, Starvis
Main Stream: 4MP@30fps(Default) / 5MP@30fps / 1080P@30fps
With Internal POE, **Build in 4G storage**

8MP 1/2.8" SONY Sensor
120dB WDR, Starlight
Main Stream: 8MP@30fps / 6MP@30fps / 4MP@30fps / 1080P@30fps / 720P@30fps
With Internal POE, **Build in 4G Storage**



ECO SERIES
PRODUCT SHOW

ECO SERIES

Support Intrusion Detection (Based on Human Shape Detection)

FULLHAN SOC
2MP / 4MP

GK7205V200 SOC
2MP

SALE



HD Camera Series



Eco Series

Lens: 2.8mm/3.6mm/6mm

SALE

2M

HTC200F-ECO

HTC200FW-ECO

(AHD/CVI/TVI/CVBS)

1/3" CMOS Sensor

1080P/960H

DWDR, 3D NR, UTC, With IR-CUT

2M/5M Lite

(AHD/CVI/TVI)

1/3" CMOS Sensor

2M (Default) / 5M Output, With IR-CUT, DWDR, DNR, UTC

AHD: 5M@20fps, 4M@30fps, 2M@30fps

HTC500FPE-ECO

HTC500FPEW-ECO



Value+Pro Series



Lens: 2.8mm/3.6mm/6mm/8mm

2.8-12mm Manual Zoom Lens / 2.7-13.5mm Motor Zoom & Auto Focus Lens

2M

HTC200F

(AHD/CVI/TVI/CVBS)

1/3" CMOS Sensor

1080P/960H,

DWDR, 3D NR, UTC, With IR-CUT

5M/4K Lite

HTC500FKE

(AHD/CVI/TVI/CVBS)

1/2.5" CMOS Sensor

5M (Default) / 4K Output

2DNR, OSD, UTC, With IR-CUT

AHD: 8M@15fps, 5M@20fps, 4M/2M@30fps

2M/5M Lite

HTC500FPE

(AHD/CVI/TVI)

1/3" CMOS Sensor

2M (Default) / 5M Output

With IR-CUT, DWDR, DNR, UTC

AHD: 5M@20fps, 4M@30fps, 2M@30fps

5M/4K Lite

HTC500ESL

(AHD/CVI/TVI/CVBS)

1/2.8" SONY Starvis Sensor

5M (Default) / 4K Output, WDR, 3DNR, Defog,

Smart-IR, OSD, UTC, With IR-CUT, Starlight

AHD: 8M@15fps, 5M@20fps

2M/5M Lite

HTC200ESH

(AHD/CVI/TVI/CVBS)

1/2.8" SONY Starvis Sensor

2M (Default) / 5M Output

With IR-CUT, Starlight, WDR, AI-DNR, Defog, OSD, UTC,

AHD: 5M@20fps, 4M@30fps, 2M@30fps

4K/ 4K AF

HTC800ES

(AHD/CVI/TVI/CVBS)

1/2.8" SONY Starvis Sensor

8M, WDR, 3DNR, Defog, Smart-IR, OSD, UTC,

With IR-CUT, Starlight

AHD: 8M@15fps, 4M/2M@30fps;

F1.6 8MP Lens

2M/5M Lite AF

HTC2005XESH

(AHD/CVI/TVI/CVBS)

1/2.8" SONY Starvis Sensor

2M (Default) / 5M Output

With IR-CUT, Starlight, WDR, AI-DNR, Defog, OSD, UTC,

AHD: 5M@20fps, 4M@30fps, 2M@30fps

4K/ 4K AF

HTC8004XES

(AHD/CVI/TVI/CVBS)

1/2.8" SONY Starvis Sensor

8M, WDR, 3DNR, Defog, Smart-IR, OSD, UTC,

With IR-CUT, Starlight

AHD: 8M@15fps, 4M/2M@30fps;

F1.6 8MP Lens

Full Color Series

Lens: 2.8mm/3.6mm/6mm/8mm

2.7-13.5mm Motor Zoom & Auto Focus Lens

2M/5M Lite

(AHD/CVI/TVI)

HTC500FPEW

2M/5M Lite

2M/5M Lite AF

(AHD/CVI/TVI/CVBS)

HTC200ESHW

HTC2005XESHW

5M/4K Lite

(AHD/CVI/TVI/CVBS)

HTC500FKEW

5M/4K Lite

5M/4K Lite AF

(AHD/CVI/TVI/CVBS)

HTC500ESLW

HTC5005XESLW

4K/ 4K AF

(AHD/CVI/TVI/CVBS)

HTC800ESW

HTC8004XESW

SDI_EXSDI Series

(EX-SDI/HD-SDI, CVBS/AHD/TVI/CVI)

2M/2M AF

TE200SH

TE2005XSH

1/2.8" SONY Starvis Sensor

2M (Default) / 5M Output, With IR-CUT, Starlight

WDR, AI-DNR, Defog, UTC, OSD, 2x BNC Output, 2M F1.6 Lens

EX-SDI: 4M/2M@30fps/25fps, 2M@60fps/50fps,

2M@30fps/25fps, 720P@60fps/50fps, 720P@30fps/25fps

HD-SDI: 2M@30fps/25fps, 720P@30fps/25fps

4M/4M AF

HD400ESL

HD4005XESL

1/2.8" SONY Starvis Back-illuminated CMOS Sensor

4M/960H, With IR-CUT, WDR, 3DNR, Defog, Smart-IR, UTC, OSD,

2x BNC Output, 4M F1.6 Lens

EX-SDI: 8M@15fps, 4M/2M@30fps/25fps

HD-SDI: 2M@30fps/25fps

4K/4K AF

HD800ES

HD8004XES

1/2.8" SONY CMOS Sensor

8M, WDR, 3DNR, Defog, Smart-IR, UTC, OSD, With IR-CUT

WDR, 3DNR, Defog, Smart-IR, UTC, OSD

2x BNC Output, 8M F1.6 Lens

EX-SDI: 8M@15fps, 4M@25/30fps, 2M@25/30fps

Longse

More secure, More intelligent



FACEBOOK



LINKEDIN



TIKTOK



TWITTER



WECHAT



YOUTUBE



WEBSITE